



STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE
04333-0016

JOHN ELIAS BALDACCI
GOVERNOR

DAVID A. COLE
COMMISSIONER

May 11, 2009
Subject: **Auburn**
Federal Project No's. STP-1273(700)S &
STP-1305(900)S
State Pin No's. 012737.00 & 013059.00
Amendment No. 2

Dear Sir/Ms:

Make the following change to the Bid Document:

In the Bid Book, after page 79, **INSERT** the attached "SPECIAL PROVISION, SECTION 607, FENCE, (CEDAR RAIL FENCE), 2 pages dated May 7, 2009.

The following question has been received:

Question: Would you supply a detail for Item 607.22, Cedar Rail Fence?

Response: Please see the above change.

Consider this change and information prior to submitting your bid on May 13, 2009.

Sincerely,

Scott Bickford
Contracts & Specifications Engineer



PRINTED ON RECYCLED PAPER

SPECIAL PROVISION
SECTION 607
FENCE
(CEDAR RAIL FENCE)

Description This work shall consist of furnishing and erecting a Cedar Rail Fence as shown on the plans and in accordance with these Special Provisions and a in accordance with these Special Provisions and as directed by the Resident.

MATERIALS

Materials Posts and rails shall be fabricated with northern white cedar. Posts shall be nominal 6" x 6" x 7-foot length; Rails shall nominal 4" x 6" x 11 foot length.

CONSTRUCTION REQUIREMENTS

Posts shall be set as shown on the plans in augured or hand dug holes approx 3' in depth such tat the tops are 48" above finish grade. The fence shall be placed as shown on the plans or as directed by the Engineer. There shall be 3 rails for each section of fence.


After the posts are placed, and the rails are installed and the posts aligned, the holes shall be backfilled with earth placed in 12" layers and compacted. The completed fence shall have the tops of the posts at a uniform height above ground following the gradient of the ground.

Method of Measurement Cedar Fence will be measured by the linear foot accepted in place. Measurement will be along the gradient of the fence from outside to outside end of posts.

Basis of Payment The accepted quantities of fence shall be paid for at the contract unit price per linear foot, complete and in place. Such payment shall be full compensation for furnishing and assembling all materials, for excavating and backfilling holes and for all incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
607.22 Cedar Rail Fence	Linear Foot

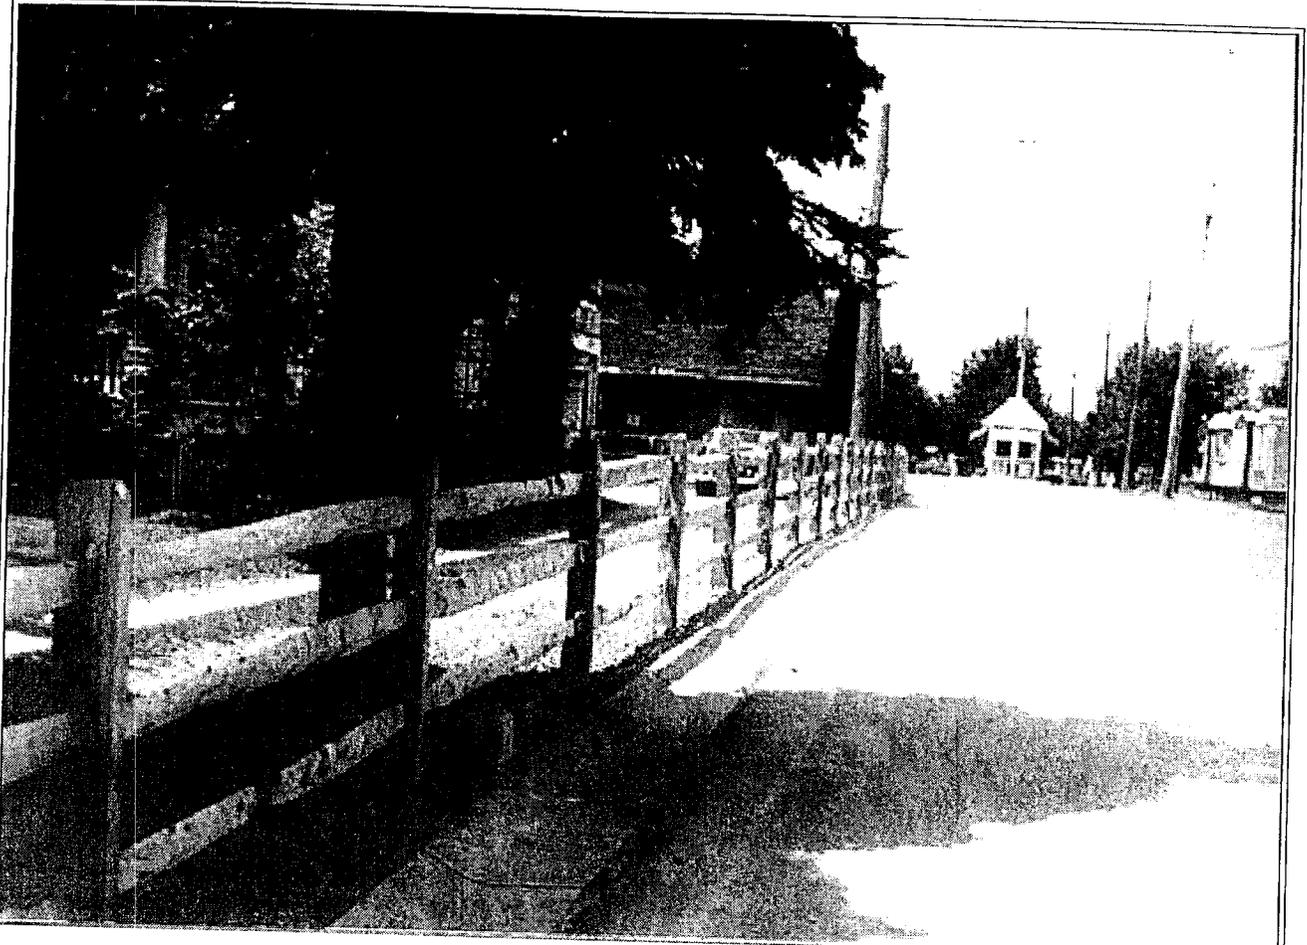

Three Rail Split Rail Fence

