



STATE OF MAINE
DEPARTMENT OF TRANSPORTATION
16 STATE HOUSE STATION
AUGUSTA, MAINE
04333-0016

JOHN ELIAS BALDACCI
GOVERNOR

DAVID A. COLE
COMMISSIONER

December 29, 2006
Subject: **Old Town**
Project No. BR-1266(100)
Pin No. 12661.00
Amendment No. 1

Dear Sir/Ms:

Please make the following changes to the Bid Documents:

In the Book, REMOVE the existing Project Map in "Special Provision 105, Construction Area" and REPLACE with the attached new Project Map.

In the Plan Sheets, on page two of twenty-four titled: "Estimated Quantities and General Construction Notes" under General Construction Notes, DELETE in its entirety note twenty-two that begins "The existing structure shall..." and REPLACE with the following:

"22. The existing bridge superstructure shall be removed in its entirety. The existing substructure shall be removed as follows: Existing timber piles that conflict with new piles shall be removed in their entirety. The remaining timber abutment and timber pile bent material shall be removed to at least one foot below the streambed or the bottom of the Pay Limits for Structural Earth Excavation and Granular Borrow, whichever is lower. Where left in place, timber piles, timber cribbing, cobbles and boulders at the abutment and pier bent locations may obstruct pile driving operations. These obstructions may be cleared by conventional excavations methods, pre-drilling, spudding or rotary percussive duplex overburden drilling techniques. All payment for substructure pile removal effort is included under the Bridge Removal pay item. All payment for below grade excavation of timber and boulder obstructions will be made in accordance with Subsection 206.05 of the Standard Specifications. Payment for removal of obstructed piles and redriving of piles will be considered incidental to the in-place pile pay item." Make this change in pen and ink.



PRINTED ON RECYCLED PAPER

In the Plan Sheets, on page two of twenty-four titled: "Estimated Quantities and General Construction Notes" under General Construction Notes, ADD the following note twenty-nine that states:

"29. Creosote-treated timbers shall be managed and disposed of in accordance with Subsection 656.3.6.f of the Standard Specifications." Make this change in pen and ink.

Consider these changes prior to submitting your bid on January 24, 2007.


Sincerely,

A handwritten signature in black ink, appearing to read "Scott Bickford", written over the printed name.

Scott Bickford

Contracts & Specifications Engineer

Old Town 12661.00 (Atlas Map 33)

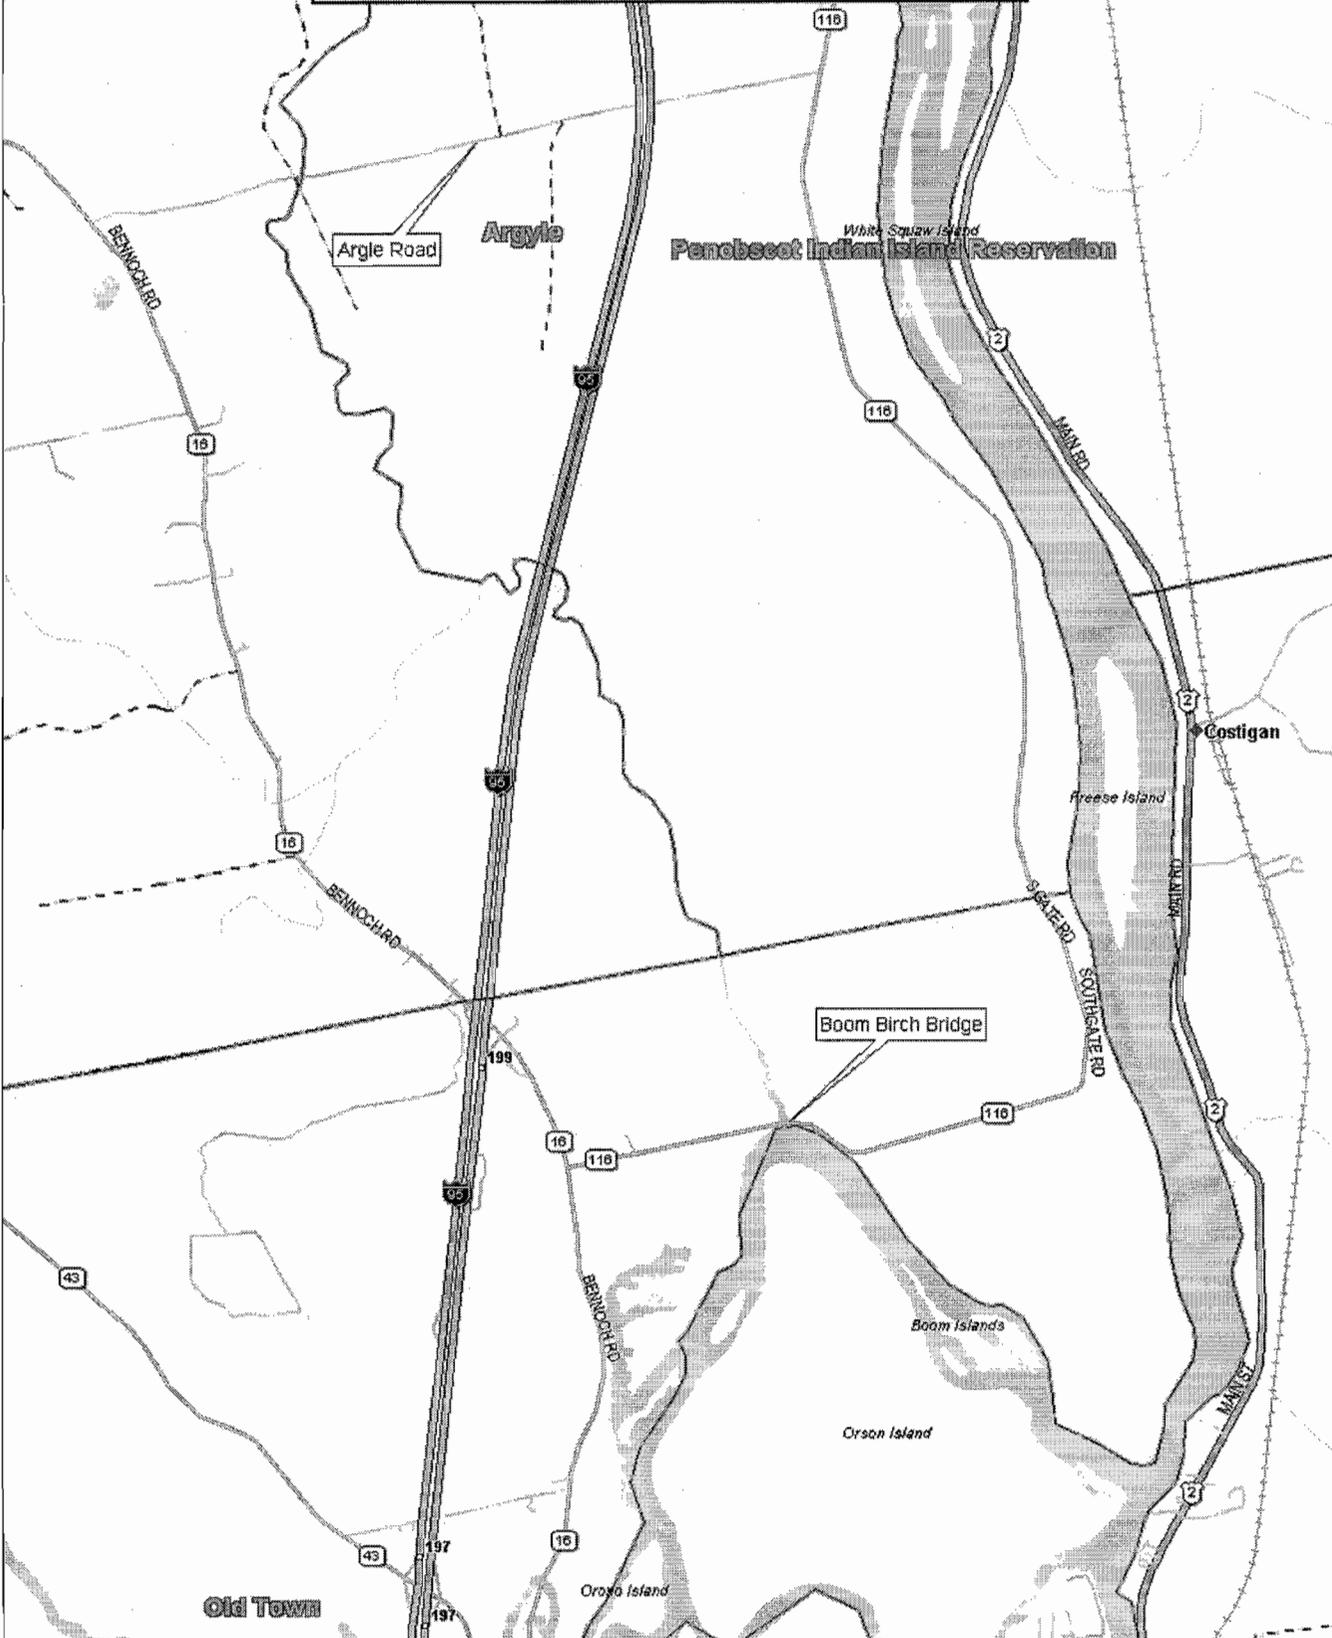

DELORME

Data use subject to license.
© 2004 DeLorme. Street Atlas USA® 2005.
www.delorme.com

