

WATERSHED DESCRIPTION

This **TMDL** applies to a 1.57 mile section of Penley Brook, located in the City of Auburn, Maine. The impaired segment of Penley Brook begins in the western portion of the watershed just east of I-95 and flows east through a largely agricultural area, crossing Penley Corner Road and Riverside Drive before flowing into the Androscoggin River. The Penley Brook watershed covers an area of 0.66 square miles.

- ➤ Runoff from agricultural land located throughout the watershed is likely the largest source of **nonpoint source** (NPS) pollution to Penley Brook. Runoff from cultivated lands, active hay lands, and pasture can transport nitrogen and phosphorus to the nearest section of the stream.
- ➤ The Penley Brook watershed is predominately nondeveloped (94.8%). Forested areas (22.1%) within the watershed absorb and filter pollutants helping protect both water quality in the stream and stream channel stability.
- Non-forested areas within the watershed are predominantly agricultural (72.7%) and are located throughout the central portion of the watershed.
- ➤ Developed areas (5.2%) with impervious surfaces in close proximity to the steam may impact water quality.
- ➤ Penley Brook is on Maine's 303(d) list of Impaired Streams (Maine DEP, 2013).

Waterbody Facts

Segment ID:

ME0104000210_413R02

City: Auburn, ME

County: Androscoggin

Impaired Segment Length:

1.57 miles

Classification: Class B

Direct Watershed: 0.66 mi²

(422.4 acres)

Impairment Listing Cause:


Dissolved Oxygen

Watershed Agricultural Land

Use: 72.69%

Major Drainage Basin:


Androscoggin River



Definitions

- Total Maximum Daily Load (TMDL) represents the total amount of pollutants that a waterbody can receive and still meet water quality standards.
- **Nonpoint Source Pollution** refers to pollution that comes from many diffuse sources across the landscape, and is typically transported by rain or snowmelt runoff.

Watershed Land Uses



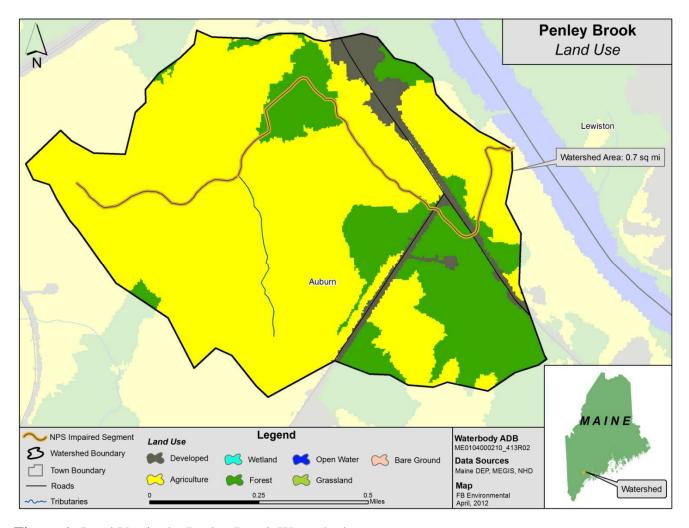


Figure 1: Land Use in the Penley Brook Watershed

WHY IS A TMDL ASSESSMENT NEEDED?

Penley Brook, a Class B freshwater stream, has been assessed by Maine DEP as not meeting water quality standards for the designated use of aquatic life, and placed on the 303(d) list of impaired waters under the Clean Water Act. The Clean Water Act requires that all 303(d)-listed waters undergo a TMDL assessment that describes the impairments and establishes a target to guide the measures needed to restore water quality. The goal is for all waterbodies to comply with state water quality standards.

Agricultural land in the Penley Brook watershed makes up about 73% of the watershed land use. This is almost fourteen times more than the area of developed land which makes up about 5% of the watershed area. Forested areas



Penley Brook upstream of the Riverside Drive road crossing in Auburn. Photo: FB Environmental

only account for about 22% of the watershed, and 94% of the impaired stream segment length passes through agricultural land (Figure 1). Agriculture, therefore, is likely to be the largest contributor of sediment and nutrient enrichment to the stream. The close proximity of many agricultural lands to the stream further increases the likelihood that nutrients from disturbed soils, manure, and fertilizers will reach the stream.

WATER QUALITY DATA ANALYSIS

Maine DEP uses a variety of data types to measure the ability of a stream to adequately support aquatic life, including; dissolved oxygen, benthic macroinvertebrates, and periphyton (algae). The aquatic life impairment in Penley Brook is based on historic dissolved oxygen data.

TMDL ASSESSMENT APPROACH: NUTRIENT MODELING OF IMPAIRED AND ATTAINMENT STREAMS

NPS pollution is difficult to measure directly, because it comes from many diffuse sources spread across the landscape. For this reason, a nutrient loading model, MapShed, was used to estimate the sources of pollution based on well-established hydrological equations; detailed maps of soil, land use, and slope; many years of daily weather data; and direct observations of agriculture and other land uses within the watershed.

The nutrient loading estimates for the impaired stream were compared to similar estimates for five non-impaired (attainment) streams of similar watershed land uses across the state. The TMDL for the impaired stream was set as the mean nutrient loading estimate of these attainment stream watersheds, and units of mass per unit watershed area per year (kg/ha/year) were used. The difference in loading estimates between the impaired and attainment watersheds represents the percent reduction in nutrient loading required under this TMDL. The attainment streams and their nutrient and sediment loading estimates and TMDL are presented below in Table 1.

Table 1: Numeric Targets for Pollutant Loading Based on MapShed Model Outputs for Attainment Streams

Attainment Streams	Town	TP load (kg/ha/yr)	TN load (kg/ha/yr)	Sediment load (1000 kg/ha/yr)
Martin Stream	Fairfield	0.14	3.4	0.008
Footman Brook	Exeter	0.33	6.4	0.058
Upper Kenduskeag Stream	Corinth	0.29	5.6	0.047
Upper Pleasant River	Gray	0.22	4.6	0.016
Moose Brook	Houlton	0.25	5.9	0.022
Total Maximum Daily Load		0.24	5.2	0.030

RAPID WATERSHED ASSESSMENT

Habitat Assessment

A Habitat Assessment survey was conducted on both the impaired and attainment streams. The assessment approach is based on the *Rapid Bioassessment Protocols for Use in Wadeable Streams and Rivers* (Barbour et al., 1999), which integrates various parameters relating to the structure of physical habitat. The habitat assessments include a general description of the site, physical characterization and visual assessment of in-stream and riparian habitat quality.

Based on Rapid Bioassessment protocols for low gradient streams, Penley Brook received a score of 140 out of a total 200 for quality of habitat. Higher scores indicate better habitat. The range in habitat assessment scores for attainment streams was 155 to 179.

Habitat assessments were conducted on a relatively short sample reach (about 100-200 meters for a typical small stream) near the most downstream Maine DEP sample station in the watershed. For both

impaired and attainment streams, the assessment location was usually near a road crossing for ease of access. In the Penley Brook watershed, the downstream sample station was located upstream of the Riverside Drive stream crossing which is one of only two stream crossings on Penley Brook. The assessment took place within a forested area, However, active corn fields are located nearby to the north and east across Riverside Drive. Also, a powerline corridor is located just north of the sample reach, and a residential property can be found to the south west. The reach did have a thick forested buffer, but multiple drainage ways were observed entering Penley Brook within the sample reach and depositing sediment at each confluence.

Figure 2 (right) shows the range of habitat assessment scores for all attainment and impaired streams, as well as for Penley Brook. Although these scores show that habitat is clearly an issue in the impairment of Penley Brook, it is important to look for other potential sources within the watershed leading to impairment. Consideration should be given to major "hot spots" in the Penley Brook watershed as potential sources of NPS pollution contributing to the water quality impairment.

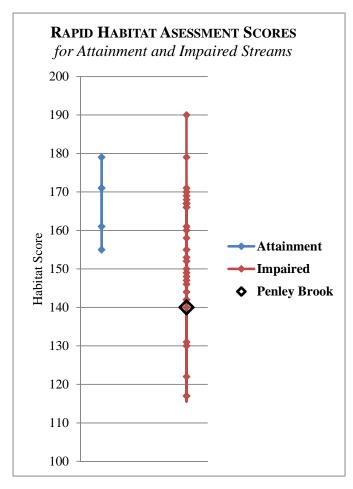


Figure 2: Habitat Assessment Scores

Pollution Source Identification

Pollution source identification assessments were conducted for both Penley Brook (impaired) and the attainment streams. The source identification work is based on an abbreviated version of the Center for

Watershed Protection's Unified Subwatershed and Site Reconnaissance method (Wright, et al., 2005). The abbreviated method includes both a desktop and field component. The desktop assessment consists of generating and reviewing maps of the watershed boundary, roads, land use and satellite imagery, and then identifying potential NPS pollution locations, such as road crossings, agricultural fields, and large areas of bare soil. When available, multiple sources of satellite imagery were reviewed. Occasionally, the high resolution of the imagery allowed for observations of livestock, row crops, eroding stream banks, sediment laden water, junkyards, and other potential NPS concerns that could affect stream quality. As many potential pollution sources as possible were visited, assessed and documented in the field. Field visits were limited to NPS sites that were visible from roads or a short walk from a roadway. Neighborhoods were assessed for NPS pollution at the whole neighborhood level including streets and storm drains (where applicable). The assessment does not include a scoring component, but does include a detailed summary of findings and a map indicating documented NPS sites throughout the watershed.

The watershed source assessment for Penley Brook was completed on July 20, 2012. In-field observations of erosion, lack of vegetated stream buffer, extensive impervious surfaces, high-density neighborhoods and agricultural activities were documented throughout the watershed (Table 2, Figure 3).

Table 2: Pollution Source ID Assessment for the Penley Brook Watershed

Potential Source		ource	Notes	
ID#	Location	Type	Notes	
3	Riverside Drive	Road Crossing/Sample Reach Location	 Location of sample reach. Many sediment deposits at convergence of tributaries from the south side of reach. Water turbid in some areas. Undersized culvert at Riverside Drive. 	
5	Penley Corner Road	Road Crossing	No signs of erosion.Buffer here consists of grasses and shrubs. No trees.	
10	Unknown farm road off Riverside Drive	Agriculture	 Dirt farm road crosses stream to access agricultural fields. Stream may be intermittent upstream of this point. 	
13	Agricultural field at headwaters	Agriculture	Intermittent stream channel in agricultural fields without buffer.	

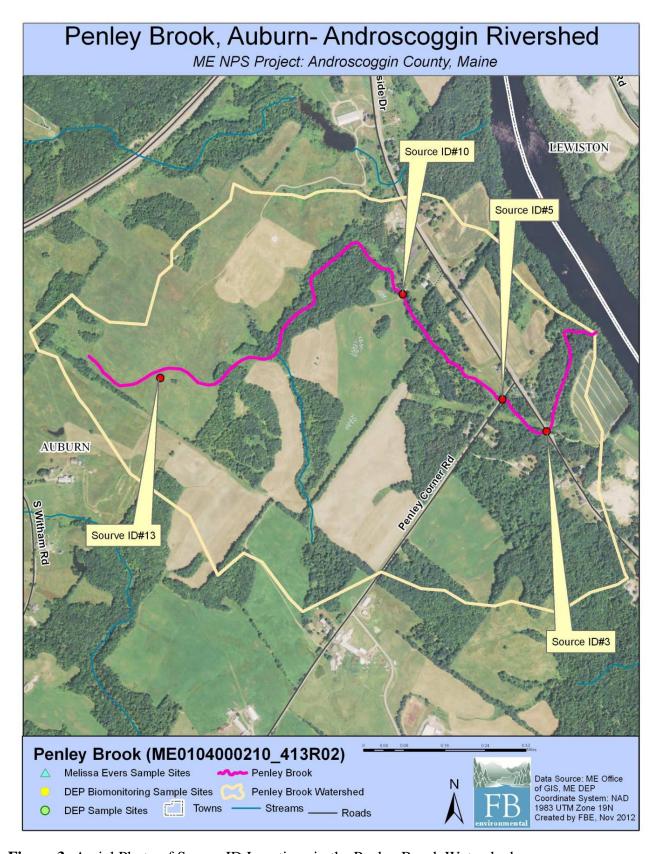


Figure 3: Aerial Photo of Source ID Locations in the Penley Brook Watershed

NUTRIENT LOADING - MAPSHED ANALYSIS

The MapShed model was used to estimate stream loading of sediment, total nitrogen and total phosphorus in Penley Brook (impaired) plus five attainment watersheds throughout the state. The model estimated nutrient loads over a 15-year period (1990-2004), which was determined by the available weather data provided within MapShed. This extended period captures a wide range of hydrologic conditions to account for variations in nutrient and sediment loading over time.

Many quality assured and regionally calibrated input parameters are provided with MapShed. Additional input parameters were manually entered into the model based on desktop research and field observations, as described in the sections on Habitat Assessment and Pollution Source Identification. These manually adjusted parameters included estimates of livestock animal units, agricultural stream miles with intact vegetative buffer, Best Management Practices (BMPs), and estimated wetland retention and/or drainage areas.

Livestock Estimates

Livestock waste contains nutrients which can cause water quality impairment. The nutrient loading model considers numbers and types of animals. Table 3 (right) shows that no livestock (numbers of animals) were found in the watershed, based on direct observations made in the watershed, plus other publicly available data.

The Penley Brook watershed is predominantly agricultural. Agricultural land uses were dominated by hay fields and corn fields. No livestock was observed during the watershed survey. However, just on the outside of the watershed boarder on Penley Corner Road there is a facility with cows and donkeys. A sign near the road read "Town of Auburn Pollution Control Compost

Table 3: Livestock Estimates in the Penley Brook Watershed

Type	Penley Brook
Dairy Cows	0
Beef Cows	0
Broilers	0
Layers	0
Hogs/Swine	0
Sheep	0
Horses	0
Turkeys	0
Other	0
Total	0

Facility" and a strong manure smell was documented here. Compost piles were noted within the Penley Brook watershed, particularly in hay fields along the east side of Penley Corner Road.

Vegetated Stream Buffer in Agricultural Areas

Vegetated stream buffers are areas of trees, shrubs, and/or grasses adjacent to streams, lakes, ponds or wetlands which provide nutrient loading attenuation (Evans & Corradini, 2012). MapShed considers natural vegetated stream buffers within agricultural areas as providing nutrient load attenuation. The width of buffer strips is not defined within the MapShed manual, and was considered to be 75 feet for this analysis. Geographic Information System (GIS) analysis of recent aerial photos along with field reconnaissance observations were used to estimate the number of agricultural stream miles with and without vegetative buffers, and these estimates were directly entered into the model.

Table 4: Summary of Vegetated Buffers in Agricultural Areas

Penley Brook

- 5.9 stream miles in watershed (includes ephemeral streams)
- 1.5 stream miles in agricultural areas
- 47% of agricultural stream miles have a vegetated buffer

Penley Brook is a 1.6 mile-long impaired segment as listed by Maine DEP. As modeled, the total stream miles (including tributaries) within the watershed was calculated as 5.9 miles. Of this total, 1.5 stream

miles are located within agricultural areas; of this length, 0.7 miles (47%) show a 75-foot or greater vegetated buffer (Table 4, Fig. 4). By contrast, agricultural stream miles (as modeled) with a 75-foot vegetated buffer in the attainment stream watersheds ranged from 34% to 92%, with an average of 61%.

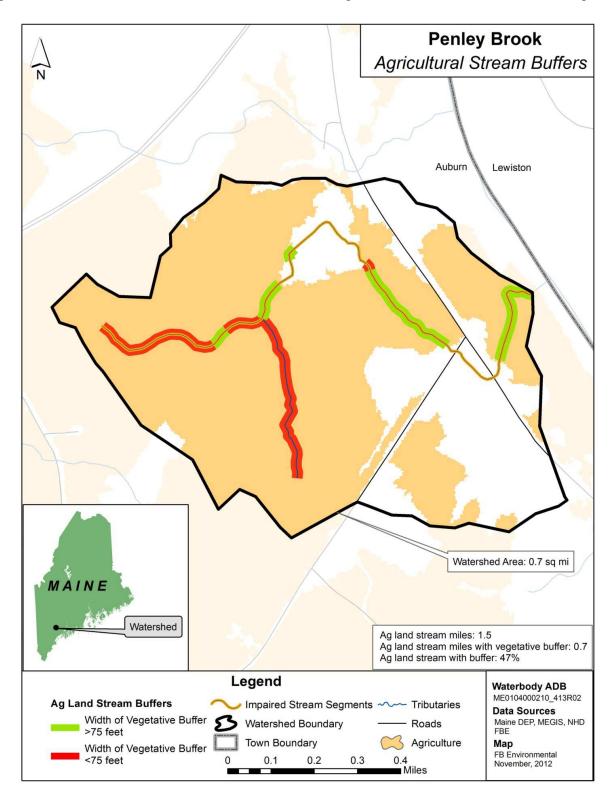


Figure 4: Buffered Agricultural Stream Miles in the Penley Brook Watershed

Best Management Practices (BMPs)

For this modeling effort, four commonly used BMPs were entered based on literature values. These estimates were applied equally to impaired and attainment stream watersheds. More localized data on agricultural practices would improve this component of the model.

- Cover Crops: Cover crops are the use of annual or perennial crops to protect soil from erosion during time periods between harvesting and planting of the primary crop. The percent of agricultural acres cover crops used within the model is estimated at 4%. This figure is based on information from the 2007 USDA Census stating that 4.1% of cropland acres is left idle or used for cover crops or soil improvement activity, and not pastured or grazed (USDA, 2007b).
- Conservation Tillage: Conservation tillage is any kind of system that leaves at least 30% of the soil surface covered with crop residue after planting. This reduces soil erosion and runoff and is one of the most commonly used BMPs. This BMP was assumed to occur in 42% of agricultural land. This figure is based on a number given by the Conservation Tillage Information Center's 2008 Crop Residue Management Survey stating that 41.5% of U.S. acres are currently in conservation tillage (CTIC, 2000).
- Strip Cropping / Contour Farming: This BMP involves tilling, planting and harvesting perpendicular to the gradient of a hill or slope using high levels of plant residue to reduce soil erosion from runoff. This BMP was assumed to occur in 38% of agricultural lands, based on a study done at the University of Maryland (Lichtenberg, 1996).
- Grazing Land Management: This BMP consists of ensuring adequate vegetation cover on grazed lands to prevent soil erosion from overgrazing or other forms of over-use. This usually employs a rotational grazing system where hays or legumes are planted for feed and livestock is rotated through several fenced pastures. In this TMDL, a figure of 75% of hay and pasture land is assumed to utilize grazing land management. This figure is based on a study by Farm Environmental Management Systems of farming operations in Canada (Rothwell, 2005).

Pollutant Load Attenuation by Lakes, Ponds and Wetlands

Depositional environments such as ponds and wetlands can attenuate watershed sediment loading. This information is entered into the nutrient loading model by a simple percentage of watershed area draining to a pond or a wetland. The Penley Brook watershed contains no wetlands of any size, therefore zero percent of the watershed drains to wetlands. Percent of watershed draining to a wetland in the attainment watersheds ranged from 15% to 60%, with an average of 35%.

NUTRIENT MODELING RESULTS

The MapShed model simulates surface runoff using daily weather inputs of rainfall and temperature. Erosion and sediment yields are estimated using monthly erosion calculations and land use/soil composition values for each source area. Below, selected results from the watershed loading model are presented. The TMDL itself is expressed in units of kilograms per hectare per year. The additional results shown below assist in better understanding the likely sources of pollution. The model results for Penley Brook indicate that a reduction in nitrogen is needed to improve water quality while no reductions of sediment and phosphorus are needed. Below, loading for sediment, nitrogen and phosphorus are discussed individually.

Sediment

Sediment loading in the Penley Brook watershed is mainly derived from hay/pasture which accounts for 80% of the total sediment load. Developed land also contributes a significant portion of the load at 13% (Table 5, Figure 5). Total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section *TMDL: Target Nutrient Levels for Penley Brook* (below) for loading estimates that have been normalized by watershed area.

Table 5: Total Sediment Loads by Source

Penley Brook	Sediment	Sediment			
remey brook	(1000kg/year)	(%)			
Source Load					
Hay/Pasture	2.26	80%			
Crop land	0.06	2%			
Forest	0.14	5%			
Wetland	0	0%			
Disturbed Land	0	0%			
Low Density Mixed	0.03	1%			
Medium Density Mixed	0	0%			
High Density Mixed	0.35	12%			
Low Density Residential	0	0%			
Medium Density Residential	0	0%			
High Density Residential	0	0%			
Farm Animals	0	0%			
Septic Systems	0	0%			
Source Load Total:	2.84	100%			
Pathway Load					
Stream Banks	1.04	-			
Subsurface / Groundwater	0	-			
Total Watershed Mass Load:	3.88				

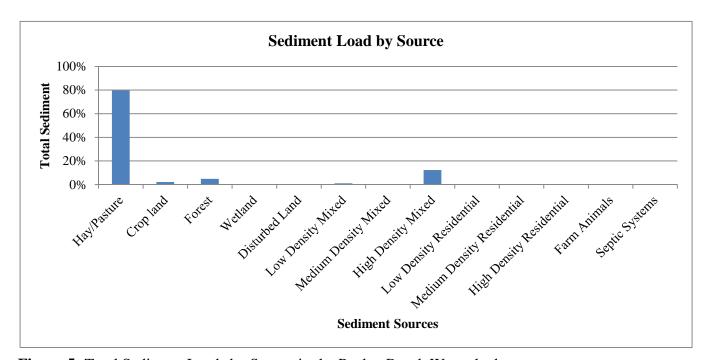


Figure 5: Total Sediment Loads by Source in the Penley Brook Watershed

Total Nitrogen

Nitrogen loading in Penley Brook is attributed mainly to septic systems which account for 47% of the total load. Agricultural sources combined make up 29% of the load, and development also contributes a significant portion of the nitrogen load at 23%. Table 6 and Figure 6 (below) show estimated total nitrogen load in terms of mass and percent of total, and by source, in Penley Brook. Total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section TMDL: Target Nutrient Levels for Penley Brook (below) for loading estimates that have been normalized by watershed area.

Table 6: Total Nitrogen Loads by Source

Danlay Duask	Total N	Total N				
Penley Brook	(kg/year)	(%)				
Source Load						
Hay/Pasture	17.2	28%				
Crop land	0.5	1%				
Forest	0.3	0%				
Wetland	0	0%				
Disturbed Land	0	0%				
Low Density Mixed	0.8	1%				
Medium Density Mixed	0	0%				
High Density Mixed	13.7	22%				
Low Density Residential	0	0%				
Medium Density Residential	0	0%				
High Density Residential	0	0%				
Farm Animals	0	0%				
Septic Systems	28.7	47%				
Source Load Total:	61.1	100%				
Pathway Load						
Stream Banks	1.0	-				
Subsurface / Groundwater	1261.3	-				
	_					
Total Watershed Mass Load:	1323.4					

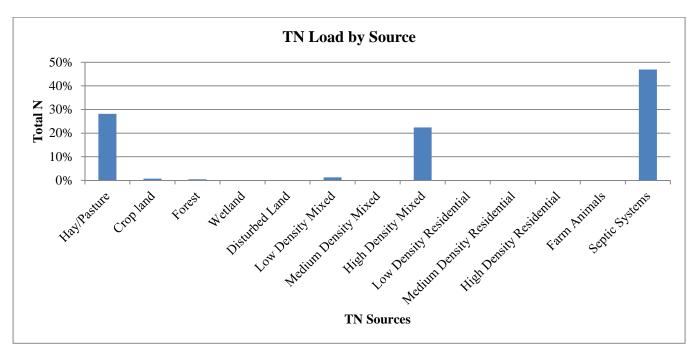


Figure 6: Total Nitrogen Loads by Source in the Penley Brook Watershed

Total Phosphorus

Phosphorus loading in the Penley Brook watershed is attributed primarily to hay/pasture which makes up 58% of the total phosphorus load. Septic systems are the secondary source and contribute 28% of the load, while development contributes 13%. Phosphorus loads are presented in Table 7 and Figure 7. Total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section *TMDL: Target Nutrient Levels for Penley Brook* (below) for loading estimates that have been normalized by watershed area.

Table 7: Total Phosphorus Loads by Source

Danley Prook	Total P	Total P				
Penley Brook	(kg/year)	(%)				
Source Load						
Hay/Pasture	6.9	58%				
Crop land	0.1	1%				
Forest	0.1	1%				
Wetland	0	0%				
Disturbed Land	0	0%				
Low Density Mixed	0.1	1%				
Medium Density Mixed	0	0%				
High Density Mixed	1.4	12%				
Low Density Residential	0	0%				
Medium Density Residential	0	0%				
High Density Residential	0	0%				
Farm Animals	0	0%				
Septic Systems	3.4	28%				
Source Load Total:	11.9	100%				
Pathway Load						
Stream Banks	0	-				
Subsurface / Groundwater	17.4	-				
Total Watershed Mass Load:	29.4					

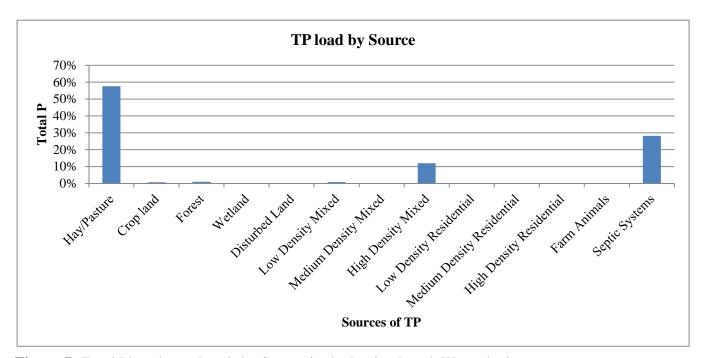


Figure 7: Total Phosphorus Loads by Source in the Penley Brook Watershed

TMDL: TARGET NUTRIENT LEVELS FOR PENLEY BROOK

The existing sediment and nutrient loads for the impaired segment of Penley Brook are listed in Table 8, along with the TMDL numeric target which was calculated from the average loading estimates of five attainment watersheds throughout the state. Table 9 presents a more detailed view of the modeling results and calculations used in Table 8 to define TMDL reductions, and compares the existing sediment and nutrient loads in Penley Brook to TMDL endpoints derived from the attainment waterbodies. Annual time frame provides a mechanism to address the daily and seasonal variability associated with nonpoint source loads

Table 8: TMDL Targets Compared to Penley Brook Pollutant Loading

TMDL POLLUTANT LOADS Annual Loads per Unit Area	Estimated Loads Penley Brook	Total Maximum Daily Load Numeric Target	TMDL % REDUCTIONS Penley Brook
Sediment Load (1000 kg/ha/year)	0.022	0.030	No Reduction Needed
Nitrogen Load (kg/ha/year)	7.65	5.2	32%
Phosphorus Load (kg/ha/year)	0.17	0.24	No Reduction Needed

Future Loading

The prescribed reduction in pollutants discussed in this TMDL reflects reduction from estimated existing conditions. Expansion of agricultural and development activities have the potential to increase runoff and associated pollutant loads to the Penley Brook. To ensure that the TMDL targets are attained, future agriculture or development activities in the watershed will need to meet the TMDL targets. Future growth from population increases is a moderate threat in the Penley Brook watershed because Androscoggin County has increasing population trends, with a 3% increase between 2000 and 2008 (USM MSAC, 2009). The growth in agricultural lands is also increasing, with a 13% increase in the total number of farms in Androscoggin County between 2002 and 2007. However, a decrease of 9% was seen in the land (acres) in farms between 2002 and 2007, and a 19% decrease occurred in the average farm size in this time period as well (USDA, 2007a). Future activities and BMPs that achieve TMDL reductions are addressed below.

Next Steps

The use of agricultural and developed area BMPs can reduce sources of polluted runoff in Penley Brook. It is recommended that municipal officials, landowners, and conservation stakeholders in Auburn work together to develop a watershed management plan to:

- Encourage greater citizen involvement through the development of a watershed coalition to ensure the long term protection of Penley Brook;
- Address <u>existing</u> nonpoint source problems in the Penley Brook watershed by instituting BMPs where necessary; and
- ➤ Prevent <u>future</u> degradation of Penley Brook through the development and/or strengthening of a local Nutrient Management Ordinance.

Table 9: Modeling Results Calculations for Derived Numeric Targets and Reduction Loads for Penley Brook

Penley Brook					
	Area ha	Sediment 1000kg/yr	TN kg/yr	TP kg/yr	
Land Uses			.	Ų,	
Hay/Pasture	123	2.3	17.22	6.87	
Crop land	3	0.1	0.5	0.1	
Forest	38	0.1	0.3	0.1	
Wetland	0	0.0	0.0	0.0	
Disturbed Land	0	0.0	0.0	0.0	
Low Density Mixed	3	0.0	0.8	0.1	
High Density Mixed	6	0.4	13.7	1.4	
Other Sources					
Farm Animals			0.0	0.0	
Septic Systems			28.7	3.4	
Pathway Loads					
Stream Banks		1.0	1.0	0.0	
Groundwater			1261.3	17.4	
Total Annual Load		4.0 x 1000 kg	1323 kg	29 kg	
Total Area	173 ha	10 1- 10 0 1-		->6	
Total Maximum Daily Load		0.022 1000kg/ha/year	7.65 kg/ha/year	0.17 kg/ha/year	

REFERENCES

- Barbour, M.T., J. Gerritsen, B.D. Snyder, and J.B. Stribling. 1999. Rapid Bioassessment Protocols for Use in Wadeable Streams and Rivers: Periphyton, Benthic Macroinvertebrates and Fish, Second Edition. EPA 841-B-99-002. U.S. Environmental Protection Agency; Office of Water; Washington, D.C.
- Conservation Tillage Information Center (CTIC). 2000. Crop Residue Management Survey. National Association of Conservation Districts. Retrieved from: http://www.ctic.purdue.edu
- Davies, S. P., and L. Tsomides. 2002. Methods for Biological Sampling of Maine's Rivers and Streams. DEP LW0387-B2002, Maine Department of Environmental Protection, Augusta, ME.
- Evans, B.M., & K.J. Corradini. 2012. MapShed Version 1.0 Users Guide. Penn State Institute of Energy and the Environment. Retrieved from: http://www.mapshed.psu.edu/Downloads/MapShedManual.pdf
- Lichtenberg, E. 1996. Using Soil and Water Conservation Practices to Reduce Bay Nutrients: How has Agriculture Done? Economic Viewpoints. Maryland Cooperative Extension Service, University of Maryland at College Park and University of Maryland Eastern Shore, Department of Agricultural and Resource Economics, 1(2).
- Maine Department of Environmental Protection (Maine DEP). 2013. Draft 2012 Integrated Water Quality Monitoring and Assessment Report. Bureau of Land and Water Quality, Augusta, ME.
- Rothwell, N. 2005. Grazing Management in Canada. Farm Environmental Management in Canada. http://publications.gc.ca/Collection/Statcan/21-021-M/21-021-MIE2005001.pdf.
- University of Southern Maine Muskie School of Public Service, Maine Statistical Analysis Center (USM MSAC). December, 2009. Retrieved from: http://muskie.usm.maine.edu/justiceresearch/Publications/County/Androscoggin.pdf
- United States Department of Agriculture (USDA). 2007a. 2007 Census of Agriculture: Androscoggin County, Maine. Retrieved from:
 http://www.agcensus.usda.gov/Publications/2007/Online_Highlights/County_Profiles/Maine/cp23001.pdf
- United States Department of Agriculture (USDA). 2007b. 2007 Census of Agriculture: State and County Reports. National Agricultural Statistics Service. Retrieved from:

 http://www.agcensus.usda.gov/Publications/2007/Full_Report/Volume_1, Chapter 1 State Lev el/Maine/st23 1 008 008.pdf
- Wright, T., C. Swann, K. Cappiella, and T. Schueler. (2005). Unified Subwatershed and Site Reconnaissance: A User's Manual. Center for Watershed Protection. Ellicott City, MD.