### WATERSHED DESCRIPTION

This **TMDL** applies to a 5.5 mile section of Carlton Brook, located in the Town of Whitefield, Maine. Carlton Brook begins in a wetland and continues through several wetlands in the upstream segment and then flows through a predominantly forested landscape. The lower portion of the stream flows south and eventually crosses East River Road, before its confluence with the Sheepscot River. The Carlton Brook watershed covers an area of 3.81 square miles.

- > Runoff from agricultural land located along East River Road in the southern portion is likely the largest sources of nonpoint source (NPS) pollution to Carlton Brook. Runoff from cultivated lands, active hay lands, and pasture can transport nitrogen and phosphorus to the nearest section of the stream.
- The Carlton Brook watershed is predominately nondeveloped (97%). Forested areas (87.7%) within the watershed absorb and filter pollutants helping protect both water quality in the stream and stream channel stability. Wetlands (3.3%) may also help filter nutrients.
- Non-forested areas within the watershed predominantly agricultural (6.1%) and are concentrated in the southern portion along E. River Road.
- Developed areas (3%) with impervious surfaces in close proximity to the steam may impact water quality.
- ➤ Carlton Brook is on Maine's 303(d) list of Impaired Streams (Maine DEP, 2013).

## Waterbody Facts

### **Segment ID:**

ME0105000305 528R06

Town: Whitefield, ME

County: Lincoln

# **Impaired Segment Length:**

5.5 miles

Classification: Class B.

**Direct Watershed:** 3.81 mi<sup>2</sup>

(2438 acres)

# **Impairment Listing Cause:**


Dissolved Oxygen

Watershed Agricultural Land


**Use:** 6.1%

# **Major Drainage Basin:**

Kennebec River



# **Watershed Land Uses**



### **Definitions**

- **Total Maximum Daily Load (TMDL)** represents the total amount of pollutants that a waterbody can receive and still meet water quality standards.
- **Nonpoint Source Pollution** *refers to pollution that comes* from many diffuse sources across the landscape, and is typically transported by rain or snowmelt runoff.

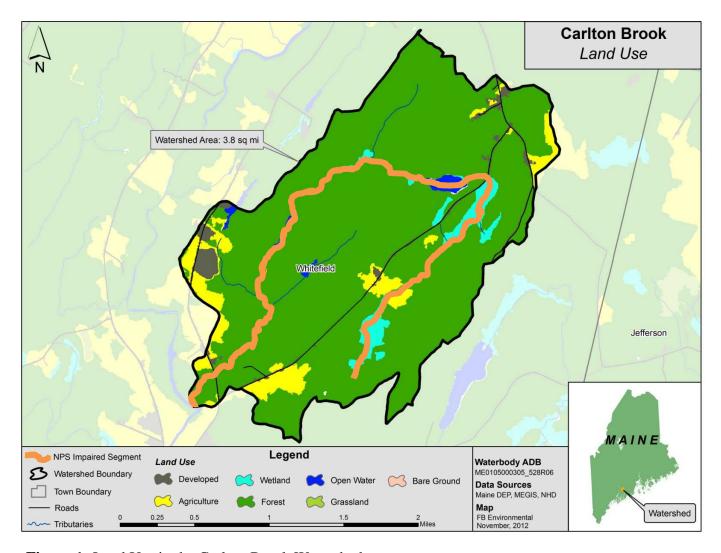


Figure 1: Land Use in the Carlton Brook Watershed

### WHY IS A TMDL ASSESSMENT NEEDED?

Carlton Brook, a Class B freshwater stream, has been assessed by Maine DEP as not meeting water quality standards for the designated use of aquatic life, and placed on the 303(d) list of impaired waters under the Clean Water Act. The Clean Water Act requires that all 303(d)-listed waters undergo a TMDL assessment that describes the impairments and establishes a target to guide the measures needed to restore water quality. The goal is for all waterbodies to comply with state water quality standards.



Carlton Brook near East River Road crossing; Photo: FB Environmental

Agriculture in the Carlton Brook watershed makes up 6.1% of the land area. Only 2% of the impaired segment length passes through agricultural land (Figure 1). Agriculture may still be contributing sediment and nutrient enrichment to the stream, especially along E. River Road. Carlton Brook, also flows through several wetlands which may naturally be lowering the dissolved oxygen concentrations of the waterbody.

### WATER QUALITY DATA ANALYSIS

Maine DEP uses a variety of data types to measure the ability of a stream to adequately support aquatic life, including; dissolved oxygen, benthic macroinvertebrates, and periphyton (algae). The aquatic life impairment in Chamberlain Brook is based on historic dissolved oxygen data. Additionally, dissolved oxygen data collected at station KSRCB03 in 2007 corroborates the impairment.

### TMDL ASSESSMENT APPROACH: NUTRIENT MODELING OF IMPAIRED AND ATTAINMENT STREAMS

NPS pollution is difficult to measure directly, because it comes from many diffuse sources spread across the landscape. For this reason, a nutrient loading model, MapShed, was used to estimate the sources of pollution based on well-established hydrological equations; detailed maps of soil, land use, and slope; many years of daily weather data; and direct observations of agriculture and other land uses within the watershed.

The nutrient loading estimates for the impaired stream were compared to similar estimates for five non-impaired (attainment) streams of similar watershed land uses across the state. The TMDL for the impaired stream was set as the mean nutrient loading estimate of these attainment stream watersheds, and units of mass per unit watershed area per year (kg/ha/year) were used. The difference in loading estimates between the impaired and attainment watersheds represents the percent reduction in nutrient loading required under this TMDL. The attainment streams and their nutrient and sediment loading estimates and TMDL are presented below in Table 1.

**Table 1:** Numeric Targets for Pollutant Loading Based on MapShed Model Outputs for Attainment Streams

Attainment Streams	Town	TP load (kg/ha/yr)	TN load (kg/ha/yr)	Sediment load (1000 kg/ha/yr)
Martin Stream	Fairfield	0.14	3.4	0.008
Footman Brook	Exeter	0.33	6.4	0.058
Upper Kenduskeag Stream	Corinth	0.29	5.6	0.047
Upper Pleasant River	Gray	0.22	4.6	0.016
Moose Brook	Houlton	0.25	5.9	0.022
Total Maximum Daily Load		0.24	5.2	0.030

#### RAPID WATERSHED ASSESSMENT

#### **Habitat Assessment**

A Habitat Assessment survey was conducted on both the impaired and attainment stream. The assessment approach is based on the *Rapid Bioassessment Protocols for Use in Wadeable Streams and Rivers* (Barbour et al., 1999), which integrates various parameters relating to the structure of physical habitat. The habitat assessments include a general description of the site and physical characterization and visual assessment of in-stream and riparian habitat quality.

Based on Rapid Bioassessment protocols for low gradient streams, Carlton Brook received a score of 170 out of a total 200 for quality of habitat. Higher scores indicate better habitat. The range of habitat assessment scores for attainment streams was 155 to 179.

Habitat assessments were conducted on a relatively short sample reach (about 100-200 meters for a typical small stream) near the most downstream Maine DEP sample station in the watershed. For both impaired and attainment streams, the assessment location was usually near a road crossing for ease of access. In the Carlton Brook watershed, the downstream sample station was located in a forested portion of the stream with a thick buffer, similar to other portions of the stream that flow through forested areas remaining shaded in most areas except for when it enters wetland areas with minimal tree cover.

Figure 2 (right) shows the range of habitat assessment scores for all attainment and impaired streams, as well as for Carlton Brook. The overlapping attainment and impaired stream scores indicate that factors other than habitat should be considered when addressing the impairments in Carlton Brook. Consideration should be given to major "hot spots" in the Carlton Brook watershed as potential sources of NPS pollution contributing to the water quality impairment.

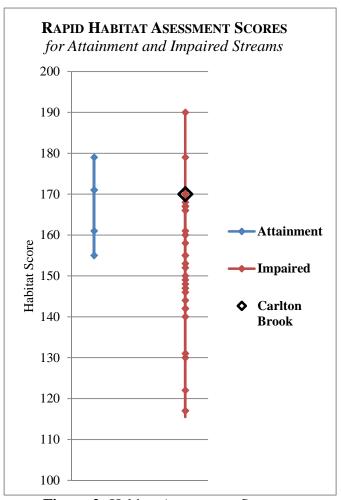


Figure 2: Habitat Assessment Scores

### **Pollution Source Identification**


Pollution source identification assessments were conducted for both Carlton Brook (impaired) and the attainment streams. The source identification work is based on an abbreviated version of the Center for Watershed Protection's Unified Subwatershed and Site Reconnaissance method (Wright, et al., 2005). The abbreviated method includes both a desktop and field component. The desktop assessment consists

of generating and reviewing maps of the watershed boundary, roads, land use and satellite imagery, and then identifying potential NPS pollution locations, such as road crossings, agricultural fields, and large areas of bare soil. When available, multiple sources of satellite imagery were reviewed. Occasionally, the high resolution of the imagery allowed for observations of livestock, row crops, eroding stream banks, sediment laden water, junkyards, and other potential NPS concerns that could affect stream quality. As many potential pollution sources as possible were visited, assessed and documented in the field. Field visits were limited to NPS sites that were visible from roads or a short walk from a roadway. Neighborhoods were assessed for NPS pollution at the whole neighborhood level including streets and storm drains (where applicable). The assessment does not include a scoring component, but does include a detailed summary of findings and a map indicating documented NPS sites throughout the watershed.

The watershed source assessment for Carlton Brook was completed on July 5, 2012. In-field observations of erosion, lack of vegetated stream buffer, extensive impervious surfaces, high-density neighborhoods and agricultural activities were documented throughout the watershed (Table 2, Figure 3).

Table 2: Pollution Source ID Assessment for the Carlton Brook Watershed

Potential Source		ource		
ID#	Location	Type	Notes	
2	East River Road	Agriculture	Hay fields; unknown whether they are active.	
4	Heath Road	Agriculture	Hay fields; seem inactive.	
5	Heath Road	Cutting/ Lot clearing	<ul><li>Multiple cleared lots for new home construction.</li><li>Active cutting.</li></ul>	
6	Heath Road	Agriculture	Hay field; unknown whether it is active.	
7	Heath Road	Forestry	Managed forestry area.	
9	Heath Road	Wetland	<ul><li>Large complex at Carlton Brook's origin.</li><li>Obvious source of low dissolved oxygen.</li></ul>	
10	Heath Road	Agriculture	<ul> <li>Horse stalls observed on residential property.</li> <li>An estimated 2 horses are located here.</li> </ul>	

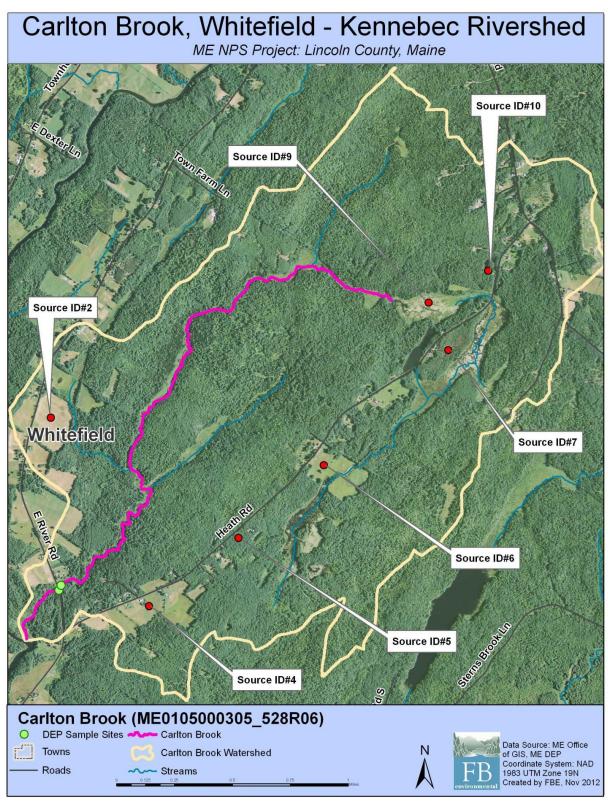

**Figure 3:** Aerial Photo of Source ID Locations in the Carlton Brook Watershed. Note that due to a mapping error only about half of the impaired stream segment is shown. See Figures 1 and 4 for full extent.

## NUTRIENT LOADING - MAPSHED ANALYSIS

The MapShed model was used to estimate stream loading of sediment, total nitrogen and total phosphorus in Carlton Brook (impaired), plus five attainment watersheds throughout the state. The model estimated nutrient loads over a 15-year period (1990-2004), which was determined by the available weather data provided within MapShed. This extended period captures a wide range of hydrologic conditions to account for variations in nutrient and sediment loading over time.

Many quality assured and regionally calibrated input parameters are provided with MapShed. Additional input parameters were manually entered into the model based on desktop research and field observations, as described in the sections on Habitat Assessment and Pollution Source Identification. These manually adjusted parameters included estimates of livestock animal units, agricultural stream miles with intact vegetative buffer, Best Management Practices (BMPs), and estimated wetland retention and/or drainage areas.

#### Livestock Estimates

Livestock waste contains nutrients which can cause water quality impairment. The nutrient loading model considers numbers and types of animals. Table 3 (right) provides estimates of livestock (numbers of animals) in the watershed, based on direct observations made in the watershed, plus other publicly available data.

The Carlton Brook watershed is predominantly forested, with very little active agriculture observed. Only two horses were estimated on Heath Road, based on horse stalls and a paddock in a residential area.

# Vegetated Stream Buffer in Agricultural Areas

Vegetated stream buffers are areas of trees, shrubs, and/or grasses adjacent to streams, lakes, ponds or wetlands which provide nutrient loading attenuation (Evans & Corradini, 2012). MapShed considers natural vegetated stream buffers within agricultural areas as providing nutrient load attenuation. The width of buffer strips is not defined within the MapShed manual, and was considered to be 75 feet for this analysis. Geographic Information System (GIS) analysis of recent aerial photos along with field reconnaissance observations were used to estimate the number of agricultural stream miles with and without vegetative buffers, and these estimates were directly entered into the model.

Carlton Brook is a 5.5 mile-long impaired segment as listed by

Maine DEP. As modeled, the total stream miles (including tributaries) within the watershed was calculated as 8.6 miles. Of this total, 0.12 stream miles are located within agricultural areas; of this length, 0.05 miles (42%) show a 75-foot or greater vegetated buffer (Table 4, Fig. 4). By contrast, agricultural stream miles (as modeled) with a 75-foot vegetated buffer in the attainment stream watersheds ranged from 34% to 92%, with an average of 61%.

**Table 3:** Livestock Estimates in Carlton Brook Watershed

Type	Carlton Brook
Dairy Cows	
Beef Cows	
Broilers	
Layers	
Hogs/Swine	
Sheep	
Horses	2
Turkeys	
Other	
Total	2

**Table 4:** Summary of Vegetated Buffers in Agricultural Areas.

#### **Carlton Brook**

- 8.6 stream miles in watershed (includes ephemeral streams)
- 0.12 stream miles in agricultural areas
- 42% of agricultural stream miles have a vegetated buffer

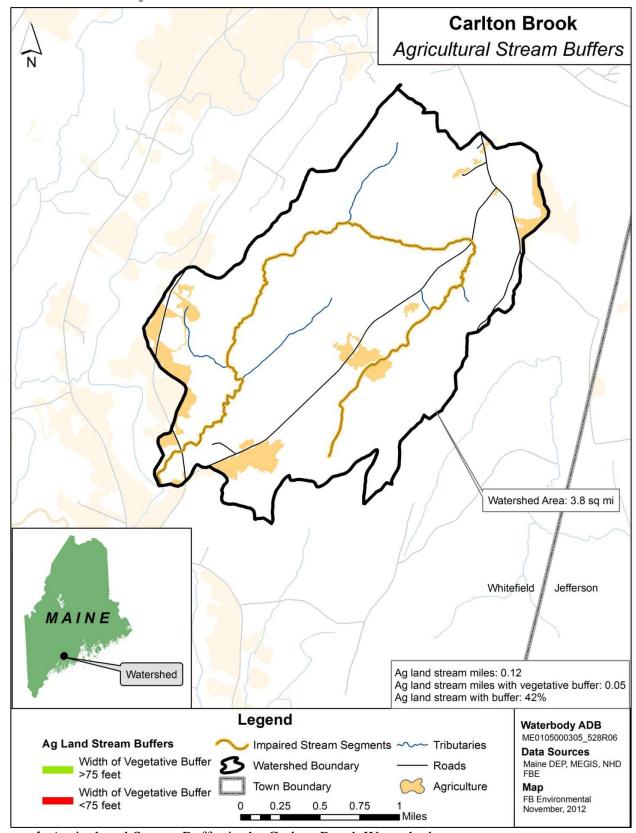


Figure 4: Agricultural Stream Buffer in the Carlton Brook Watershed

## Best Management Practices (BMPs)

For this modeling effort, four commonly used BMPs were entered based on literature values. These estimates were applied equally to impaired and attainment stream watersheds. More localized data on agricultural practices would improve this component of the model.

- Cover Crops: Cover crops are the use of annual or perennial crops to protect soil from erosion during time periods between harvesting and planting of the primary crop. The percent of agricultural acres cover crops used within the model is estimated at 4%. This figure is based on information from the 2007 USDA Census stating that 4.1% of cropland acres is left idle or used for cover crops or soil improvement activity, and not pastured or grazed (USDA, 2007b).
- Conservation Tillage: Conservation tillage is any kind of system that leaves at least 30% of the soil surface covered with crop residue after planting. This reduces soil erosion and runoff and is one of the most commonly used BMPs. This BMP was assumed to occur in 42% of agricultural land. This figure is based on a number given by the Conservation Tillage Information Center's 2008 Crop Residue Management Survey stating that 41.5% of U.S. acres are currently in conservation tillage (CTIC, 2000).
- Strip Cropping / Contour Farming: This BMP involves tilling, planting and harvesting perpendicular to the gradient of a hill or slope using high levels of plant residue to reduce soil erosion from runoff. This BMP was assumed to occur in 38% of agricultural lands, based on a study done at the University of Maryland (Lichtenberg, 1996).
- Grazing Land Management: This BMP consists of ensuring adequate vegetation cover on grazed lands to prevent soil erosion from overgrazing or other forms of over-use. This usually employs a rotational grazing system where hays or legumes are planted for feed and livestock is rotated through several fenced pastures. In this TMDL, a figure of 75% of hay and pasture land is assumed to utilize grazing land management. This figure is based on a study by Farm Environmental Management Systems of farming operations in Canada (Rothwell, 2005).

### Pollutant Load Attenuation by Lakes, Ponds and Wetlands

Depositional environments such as ponds and wetlands can attenuate watershed sediment loading. This information is entered into the nutrient loading model by a simple percentage of watershed area draining to a pond or a wetland. The Carlton Brook watershed is 3% wetland, and overall 25% of the watershed drains to wetlands. Percent of watershed draining to a wetland in the attainment watersheds ranged from 15% to 60%, with an average of 35%.

### **NUTRIENT MODELING RESULTS**

The MapShed model simulates surface runoff using daily weather inputs of rainfall and temperature. Erosion and sediment yields are estimated using monthly erosion calculations and land use/soil composition values for each source area. Below, selected results from the watershed loading model are presented. The TMDL itself is expressed in units of kilograms per hectare per year. The additional results shown below assist in better understanding the likely sources of pollution. The model results for Carlton Brook indicate that no reductions of sediment and nutrients are needed to improve water quality. Below, loading for sediment, nitrogen and phosphorus are discussed individually.

#### Sediment

Sediment loading in the Carlton Brook watershed is mainly derived from forested land and crop land which contribute 38% and 37% of the total sediment load, respectively (Table 5 and Figure 5). Developed areas contribute 15% of the sediment load to the stream. Note that total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section *TMDL: Target Nutrient Levels for Carlton Brook* below for loading estimates that have been normalized by watershed area.

**Table 5:** Total Sediment Loads by Source

Carlton Brook	Sediment	Sediment			
Cariton Brook	(1000kg/year)	(%)			
Source Load					
Hay/Pasture	0.71	7%			
Crop land	3.74	37%			
Forest	3.81	38%			
Wetland	0.03	0%			
Disturbed Land	0	0%			
Low Density Mixed	0.30	3%			
Medium Density Mixed	0	0%			
High Density Mixed	1.56	15%			
Low Density Residential	0	0%			
Medium Density Residential	0	0%			
High Density Residential	0	0%			
Farm Animals	0	0%			
Septic Systems	0	0%			
Source Load Total:	10.20	100%			
Pathway Load					
Stream Banks	1.91	-			
Subsurface / Groundwater	0	-			
Total Watershed Mass Load:	12.1				

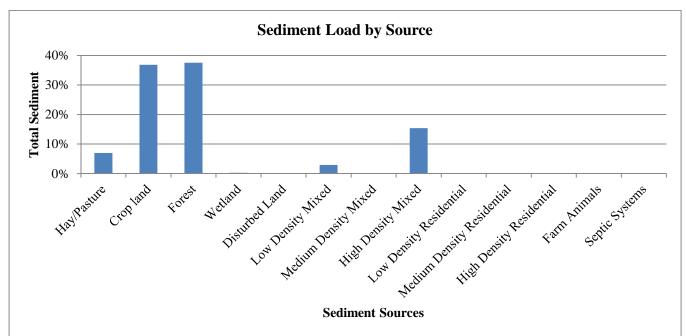


Figure 5: Total Sediment Loads by Source in the Carlton Brook Watershed

### Total Nitrogen

Nitrogen loading in the Carlton Brook watershed is primarily attributed to forested lands. Crop land is also a major source of nitrogen to Carlton Brook and accounts for 23% of the total load. Table 6 and Figure 6 show estimated total nitrogen load in terms of mass and percent of total, and by source. Note that total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section *TMDL: Target Nutrient Levels for Carlton Brook* below for loading estimates that have been normalized by watershed area.

**Table 6:** Total Nitrogen Loads by Source

Carlton Brook	Total N	Total N		
Cariton Brook	(kg/year)	(%)		
Source Load				
Hay/Pasture	30.0	6%		
Crop land	120.2	23%		
Forest	218.6	41%		
Wetland	19.3	4%		
Disturbed Land	0	0%		
Low Density Mixed	9.8	2%		
Medium Density Mixed	0	0%		
High Density Mixed	74.5	14%		
Low Density Residential	0	0%		
Medium Density Residential	0	0%		
High Density Residential	0	0%		
Farm Animals	8.3	2%		
Septic Systems	51.0	10%		
Source Load Total:	531.6	100%		
Pathway Load				
Stream Banks	1.0	-		
Subsurface / Groundwater	3797.6	-		
Total Watershed Mass Load:	4330.2			

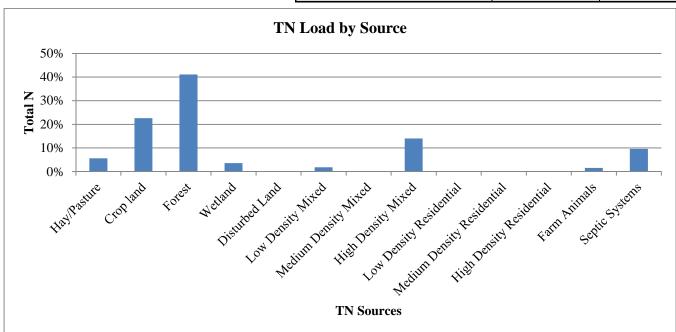


Figure 6: Total Nitrogen Loads by Source in the Carlton Brook Watershed

## **Total Phosphorus**

Phosphorus loading in the Carlton Brook watershed is attributed primarily to forested lands (29%), with crop land and hay/pasture combined accounting for 45% of loading. Phosphorus loads are presented in Table 7 and Figure 7. Note that total loads by mass cannot be directly compared between watersheds due to differences in watershed area. See section *TMDL: Target Nutrient Levels for Carlton Brook* below for loading estimates that have been normalized by watershed area.

**Table 7:** Total Phosphorus Loads by Source

Carlton Brook	Total P	Total P				
Carnon Brook	(kg/year)	(%)				
Source Load	Source Load					
Hay/Pasture	9.0	20%				
Crop land	11.2	25%				
Forest	13.1	29%				
Wetland	1.0	2%				
Disturbed Land	0	0%				
Low Density Mixed	1.1	2%				
Medium Density Mixed	0	0%				
High Density Mixed	7.5	16%				
Low Density Residential	0	0%				
Medium Density Residential	0	0%				
High Density Residential	0	0%				
Farm Animals	2.0	4%				
Septic Systems	0.8	2%				
Source Load Total:	45.6	100%				
Pathway Load						
Stream Banks	0	-				
Subsurface / Groundwater	122.5	-				
Total Watershed Mass Load:	168.0					

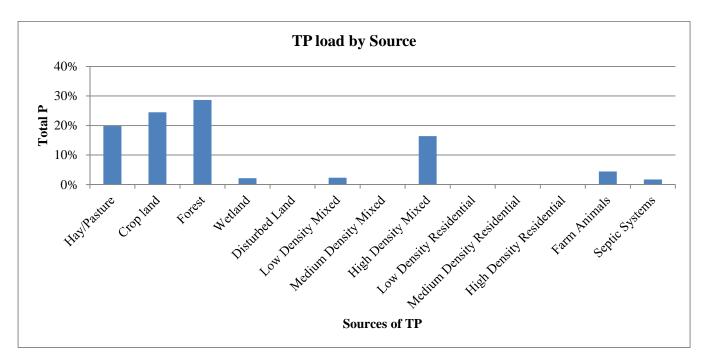


Figure 7: Total Phosphorus Loads by Source in the Carlton Brook Watershed

### TMDL: TARGET NUTRIENT LEVELS FOR CARLTON BROOK

The existing loads for sediments and nutrients in the impaired segment of Carlton Brook are listed in Table 8, along with the TMDL numeric target which was calculated from the average loading estimates of five attainment watersheds throughout the state. Table 9 presents a more detailed view of the modeling results and calculations used in Table 8 to define TMDL reductions, and compares the existing sediment and nutrient loads in Carlton Brook to TMDL endpoints derived from the attainment waterbodies. An annual time frame provides a mechanism to address the daily and seasonal variability associated with nonpoint source loads.

Table 8: TMDL Targets Compared to Carlton Brook Pollutant Loading

TMDL POLLUTANT LOADS Annual Loads per Unit Area	Estimated Loads for Carlton Brook	Total Maximum Daily Load Numeric Target	TMDL % REDUCTIONS Carlton Brook
Sediment Load (1000 kg/ha/year)	0.012	0.030	No Reduction Needed
Nitrogen Load (kg/ha/year)	4.42	5.2	No Reduction Needed
Phosphorus Load (kg/ha/year)	0.17	0.25	No Reduction Needed

## **Future Loading**

The prescribed reduction in pollutants discussed in this TMDL reflects reduction from estimated existing conditions. Expansion of agricultural and development activities have the potential to increase runoff and associated pollutant loads to Carlton Brook. To ensure that the TMDL targets are attained, future agriculture or development activities in the watershed will need to meet the TMDL targets. Future growth from population increases is a moderate threat in the Carlton Brook watershed because Lincoln County has increasing population trends, with a 3% increase between 2000 and 2008 (USM MSAC, 2009). The growth in agricultural lands is also increasing, with a 24% increase in the total number of farms in Lincoln County between 2002 and 2007. However, a decrease has occurred in both the land (acres) in farms (2%) and average farm size (21%) between 2002 and 2007 (USDA, 2007a). Future activities and BMPs that achieve TMDL reductions are addressed below.

### **Next Steps**

The use of agricultural and developed area BMPs can reduce sources of polluted runoff in Carlton Brook. It is recommended that municipal officials, landowners, and conservation stakeholders in Whitefield work together to develop a watershed management plan to:

- Encourage greater citizen involvement through the development of a watershed coalition to ensure the long term protection of Carlton Brook;
- Address <u>existing</u> nonpoint source problems in the Carlton Brook watershed by instituting BMPs where necessary; and
- Prevent <u>future</u> degradation of Carlton Brook through the development and/or strengthening of a local Nutrient Management Ordinance.

**Table 9:** Modeling Results Calculations for Derived Numeric Targets and Reduction Loads for Carlton Brook

Carlton Brook					
	Area	Sediment	TN	TP	
	ha	1000kg/yr	kg/yr	kg/yr	
Land Uses					
Hay/Pasture	33	0.7	30.0	9.03	
Crop land	29	3.7	120.2	11.2	
Forest	858	3.8	218.6	13.1	
Wetland	31	0.0	19.3	1.0	
Disturbed Land	0	0.0	0.0	0.0	
Low Density Mixed	12	0.3	9.8	1.1	
High Density Mixed	16	1.6	74.5	7.5	
Other Sources					
Farm Animals			8.3	2.0	
Septic Systems			51.0	0.8	
Pathway Loads					
Stream Banks		1.9	1.0	0.0	
Groundwater			3797.7	122.5	
Total Annual Load		12 x 1000 kg	4330 kg	123 kg	
Total Area	980 ha				
Total Maximum Daily Load		0.012 1000kg/ha/year	4.42 kg/ha/year	0.17 kg/ha/year	

#### REFERENCES

- Barbour, M.T., J. Gerritsen, B.D. Snyder, and J.B. Stribling. 1999. Rapid Bioassessment Protocols for Use in Wadeable Streams and Rivers: Periphyton, Benthic Macroinvertebrates and Fish, Second Edition. EPA 841-B-99-002. U.S. Environmental Protection Agency; Office of Water; Washington, D.C.
- Conservation Tillage Information Center (CTIC). 2000. Crop Residue Management Survey. National Association of Conservation Districts. Retrieved from: http://www.ctic.purdue.edu..
- Davies, S. P., and L. Tsomides. 2002. Methods for Biological Sampling of Maine's Rivers and Streams. DEP LW0387-B2002, Maine Department of Environmental Protection, Augusta, ME.
- Evans, B.M., & K.J. Corradini. 2012. MapShed Version 1.0 Users Guide. Penn State Institute of Energy and the Environment. Retrieved from: <a href="http://www.mapshed.psu.edu/Downloads/MapShedManual.pdf">http://www.mapshed.psu.edu/Downloads/MapShedManual.pdf</a>
- Lichtenberg, E. 1996. Using Soil and Water Conservation Practices to Reduce Bay Nutrients: How has Agriculture Done? Economic Viewpoints. Maryland Cooperative Extension Service, University of Maryland at College Park and University of Maryland Eastern Shore, Department of Agricultural and Resource Economics, 1(2).
- Maine Department of Environmental Protection (Maine DEP). 2013. Draft 2012 Integrated Water Quality Monitoring and Assessment Report. Bureau of Land and Water Quality, Augusta, ME.
- Rothwell, N. 2005. Grazing Management in Canada. Farm Environmental Management in Canada. <a href="http://publications.gc.ca/Collection/Statcan/21-021-M/21-021-MIE2005001.pdf">http://publications.gc.ca/Collection/Statcan/21-021-M/21-021-MIE2005001.pdf</a>.
- University of Southern Maine Muskie School of Public Service, Maine Statistical Analysis Center (USM MSAC). December, 2009. Retrieved from: <a href="http://muskie.usm.maine.edu/justiceresearch/Publications/County/Lincoln.pdf">http://muskie.usm.maine.edu/justiceresearch/Publications/County/Lincoln.pdf</a>
- United States Department of Agriculture (USDA). 2007a. 2007 Census of Agriculture: Lincoln County, Maine. Retrieved from:

  <a href="http://www.agcensus.usda.gov/Publications/2007/Online\_Highlights/County\_Profiles/Maine/cp23015.pdf">http://www.agcensus.usda.gov/Publications/2007/Online\_Highlights/County\_Profiles/Maine/cp23015.pdf</a>
- United States Department of Agriculture (USDA). 2007b. 2007 Census of Agriculture: State and County Reports. National Agricultural Statistics Service. Retrieved from:

  <a href="http://www.agcensus.usda.gov/Publications/2007/Full\_Report/Volume\_1">http://www.agcensus.usda.gov/Publications/2007/Full\_Report/Volume\_1</a>, Chapter 1 State Lev el/Maine/st23 1 008 008.pdf</a>
- Wright, T., C. Swann, K. Cappiella, and T. Schueler. 2005. Unified Subwatershed and Site Reconnaissance: A User's Manual. Center for Watershed Protection. Ellicott City, MD.